

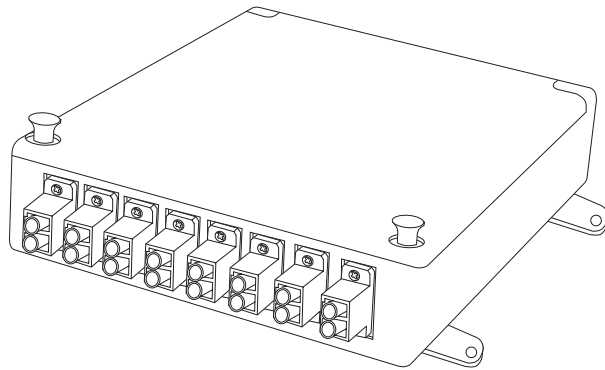


16 Port Optical Fiber Distribution with 8 LC Duplex Adapters

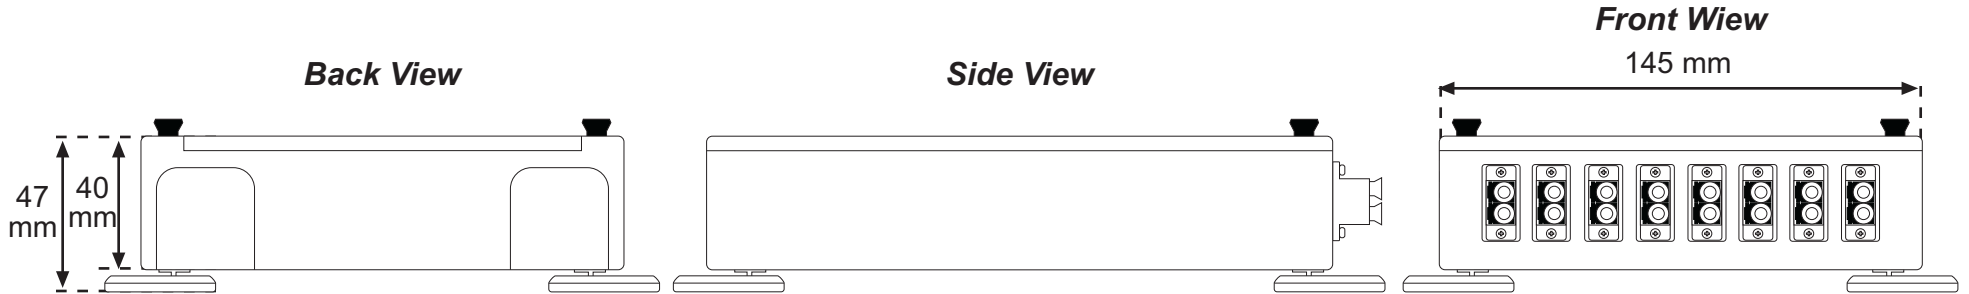

- Accessories included**
- LC / LC fully loaded adapters
 - Splice Holder
 - Dual mounting system (Wall / Rack)
 - Quick Open/Close system
 - Bracket to hold external plant cable
 - Clamps to hold reserve fiber
 - Support for central strength member

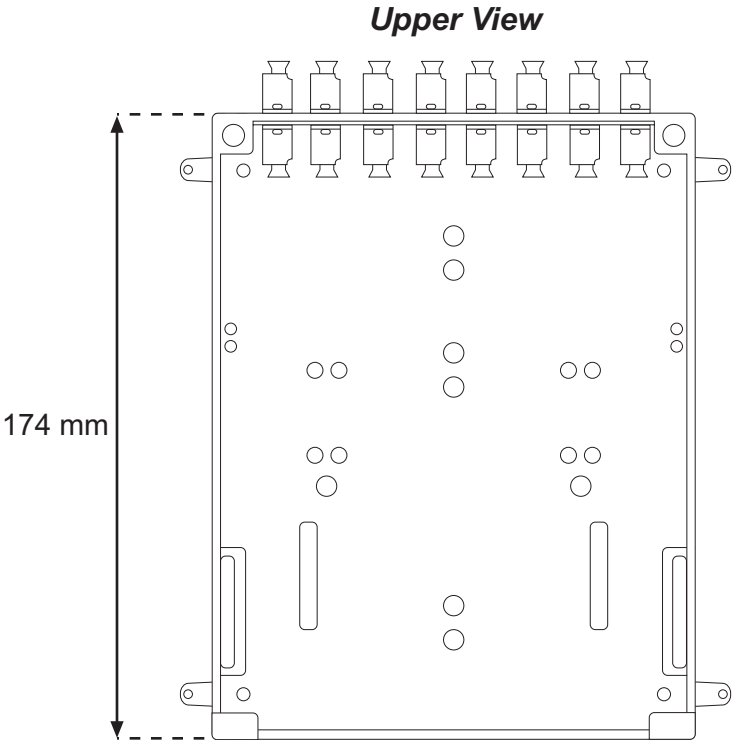

Adapters Technical Information

CHARACTERISTICS	CONDITIONS	VALUE
Insertion Loss		<0.15db
Durability	500 matings	<0.20db
Temperature Cycling	-40°C ~ + 80°C (42 cycles)	<0.20db
Humidity Cycling	75°C, 95%/336hr	<0.20db
Vibration	10 ~55Hz(2hr)	<0.20db
Impact	1.5m drop, 8 times	<0.20db

FEATURES & BENEFITS

Compliant with: JIS, IEC
 Convenient and ease of handling
 Optical performance 100% factory tested
 Flanged or threaded mounting hardware
 Excellent concentricity

APPLICATIONS

Telecommunications networks
 CATV networks
 Data communications networks
 Active device termination
 Instrumentation
 Local Area Networks