


Technical Information

CHARACTERISTICS	VALUE
Operating Temperature	-25°C + 40°C
Operating relative humidity	<=85% at 30°C
Operating wavelength	850nm, 1310 nm, 1550nm
Insertion loss	<=0.2db
Return loss	SC / PC >=50db
Life expectancy (connect/disconnect)	>1000 times
Insulation resistance	1000MOhm / 500V (DC)
Dielectric strenght	300MOhm / 500V (DC)

Upper View

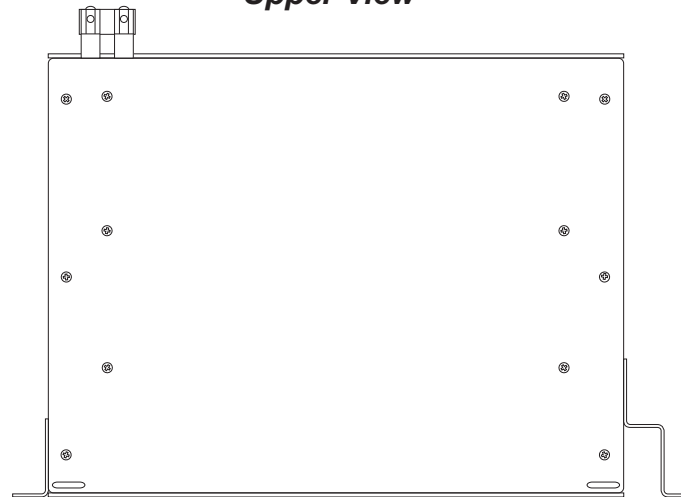


Accessories included

- 24 SC / SC fully loaded adapters
- 24 x 0.5 meter Simplex Pigtails
- 2 x Splice and adapter plates
- Support for central strength member
- Fusion splice chip


Features

- 19" standard installation
- Double Splice Trays


Back View

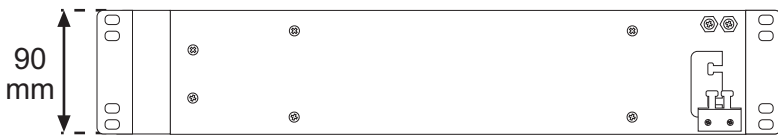

Front View

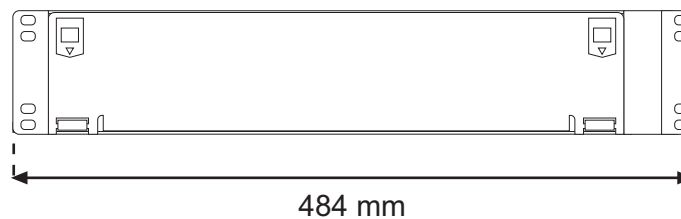

Side View

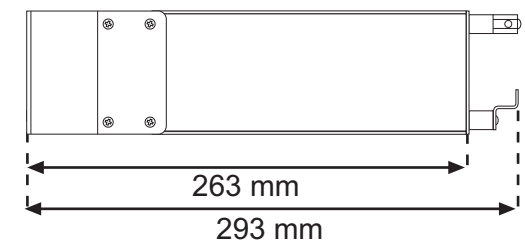



Web site: www.praxtel.com
Phone: (786) 544-0544 Miami, FL.

2U Rack Mount Enclosure with 24 SC Adapters

Page 2 - 2

