


Upper View

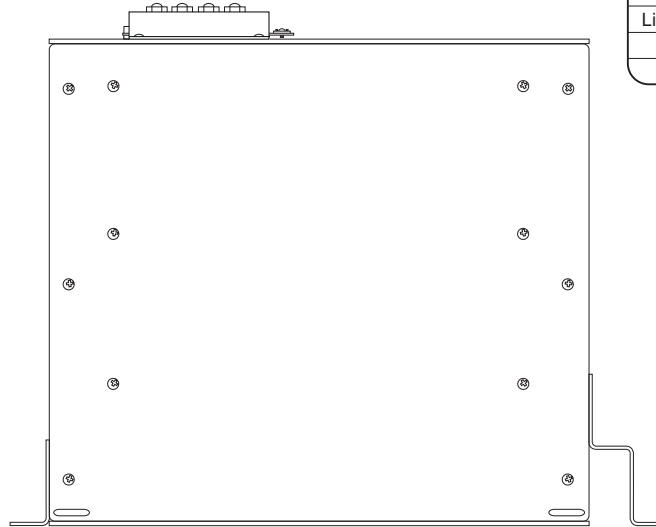

Technical Information

CHARACTERISTICS	VALUE
Operating Temperature	-25°C + 40°C
Operating relative humidity	<=85% at 30°C
Operating wavelength	850nm, 1310 nm, 1550nm
Insertion loss	<=0.2db
Return loss	SC / PC >=50db
Life expectancy (connect/disconnect)	>1000 times
Insulation resistance	1000MOhm / 500V (DC)
Dielectric strenght	300MOhm / 500V (DC)


Accessories included

- 96 SC / SC fully loaded adapters
- 96 x 0.5 meter Simplex Pigtails
- 8 x Splice and adapter plates
- Support for central strength member
- Fusion splice chip

Features


- 19" standard installation

Back View

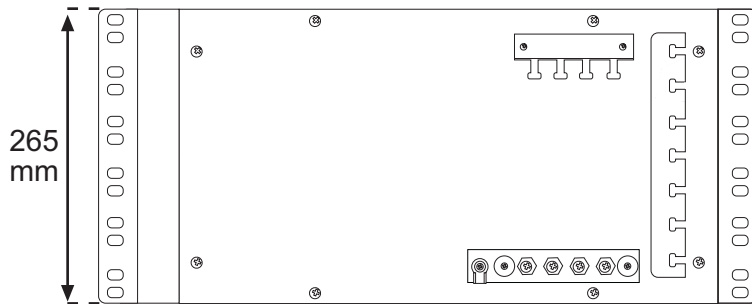


265 mm

Front View

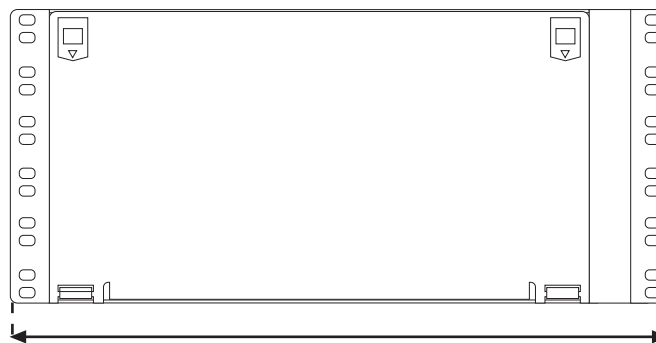

484 mm

Side View

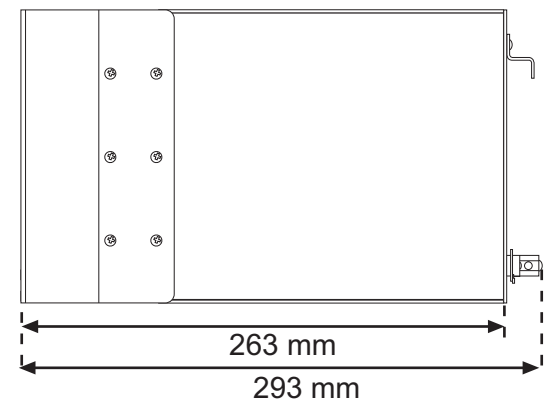

263 mm

293 mm

6U Rack Mount Enclosure with 96 SC Adapters

