

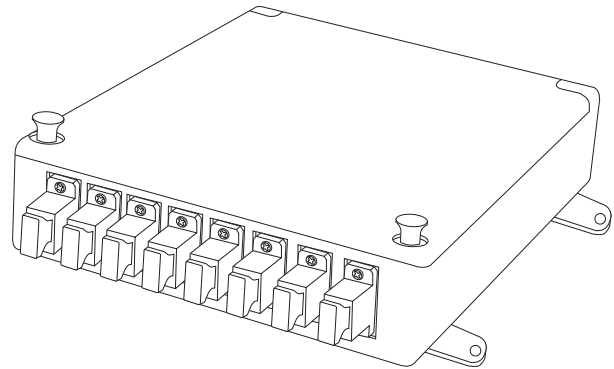


# 8 Port Optical Fiber Distribution with SC Adapters

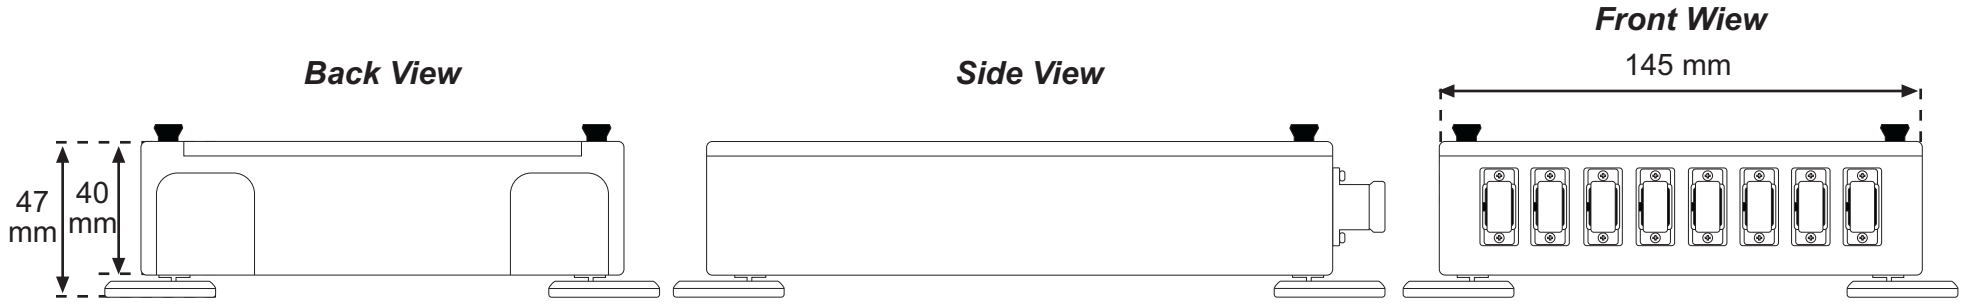

- Accessories included**
- SC / SC fully loaded adapters
  - Splice Holder
  - Dual mounting system (Wall / Rack)
  - Quick Open/Close system
  - Bracket to hold external plant cable
  - Clamps to hold reserve fiber
  - Support for central strength member

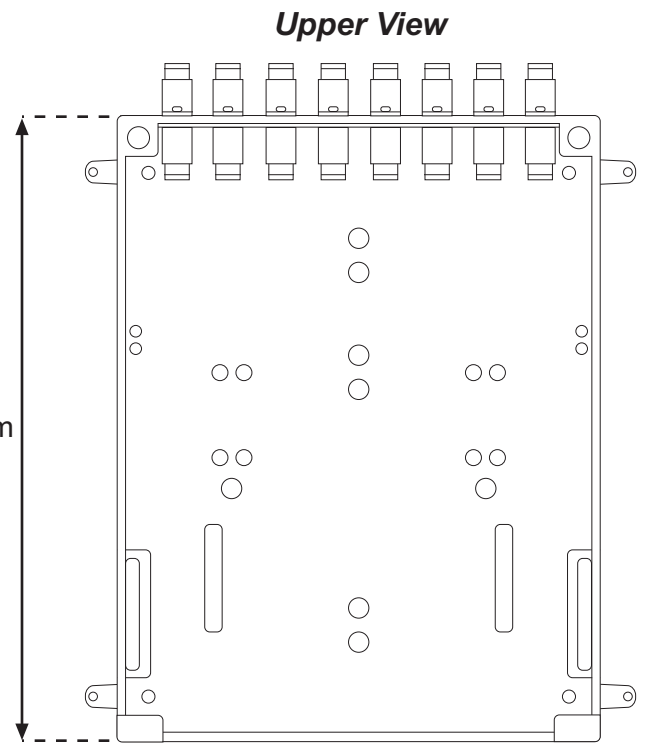

## Adapters Technical Information

CHARACTERISTICS	CONDITIONS	VALUE
Insertion Loss		<0.15db
Durability	500 matings	<0.20db
Temperature Cycling	-40°C ~ + 80°C (42 cycles)	<0.20db
Humidity Cycling	75°C, 95%/336hr	<0.20db
Vibration	10 ~55Hz(2hr)	<0.20db
Impact	1.5m drop, 8 times	<0.20db

## FEATURES & BENEFITS

- Compliant with: JIS, IEC
- Convenient and ease of handling
- Optical performance 100% factory tested
- Flanged or threaded mounting hardware
- Excellent concentricity

## APPLICATIONS

- Telecommunications networks
- CATV networks
- Data communications networks
- Active device termination
- Instrumentation
- Local Area Networks