


## Technical Information

CHARACTERISTICS	VALUE
Operating Temperature	-25°C + 40°C
Operating relative humidity	<=85% at 30°C
Operating wavelength	850nm, 1310 nm, 1550nm
Insertion loss	<=0.2db
Return loss	SC / PC >=50db
Life expectancy (connect/disconnect)	>1000 times
Insulation resistance	1000MOhm / 500V (DC)
Dielectric strenght	300MOhm / 500V (DC)


**Splice & Adapter Plate  
with Top Cover**

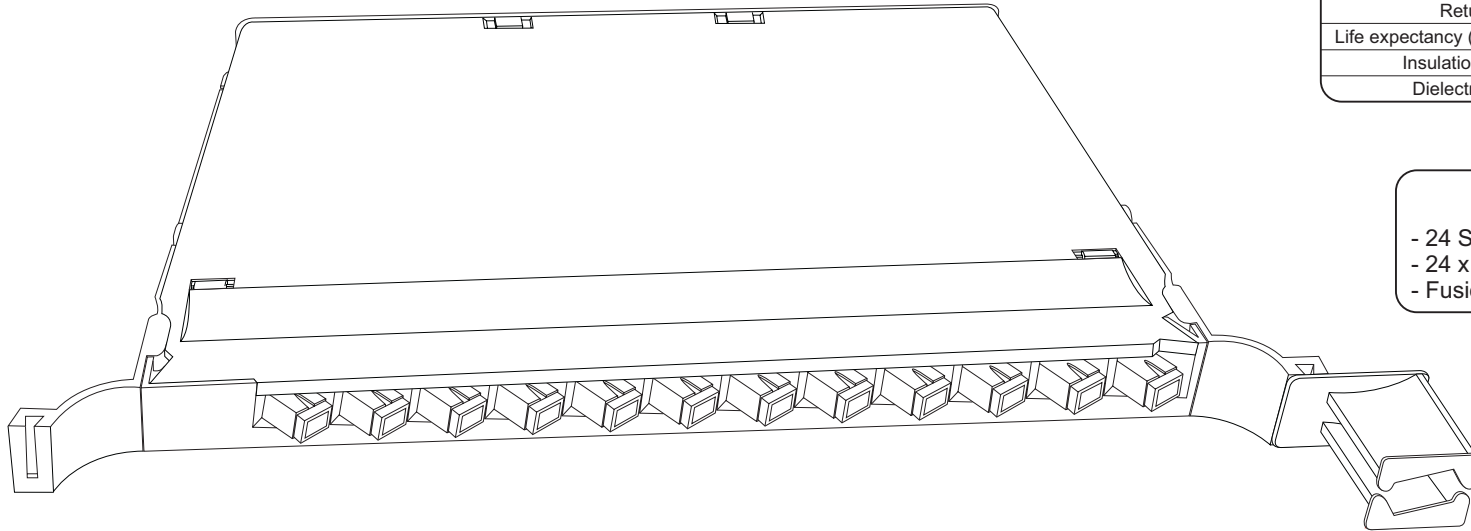


### Accessories included

- 24 SC / SC fully loaded adapters
- 24 x 0.5 meter Simplex Pigtaills
- Fusion splice chip


**Storage and Adapter Layer**

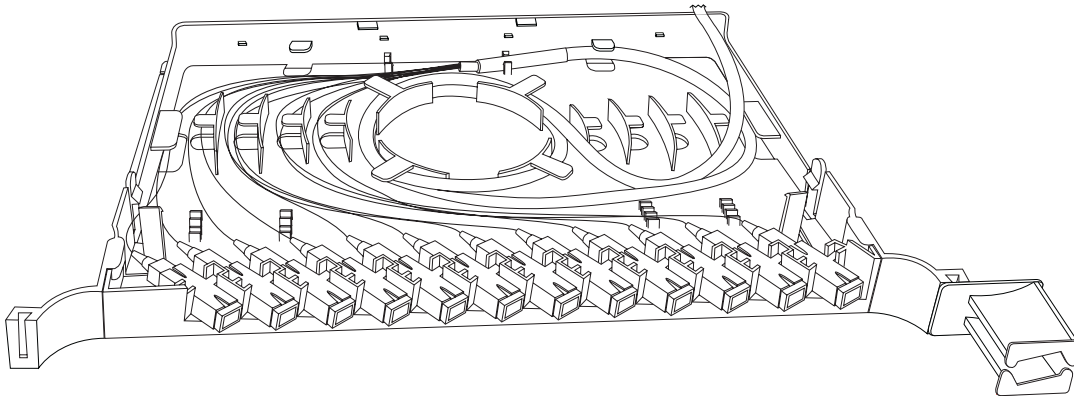

**Storage and Splicing Layer**

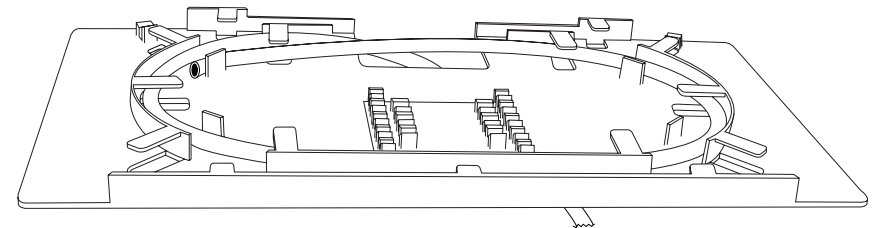

## Winding diagram at splicing layer

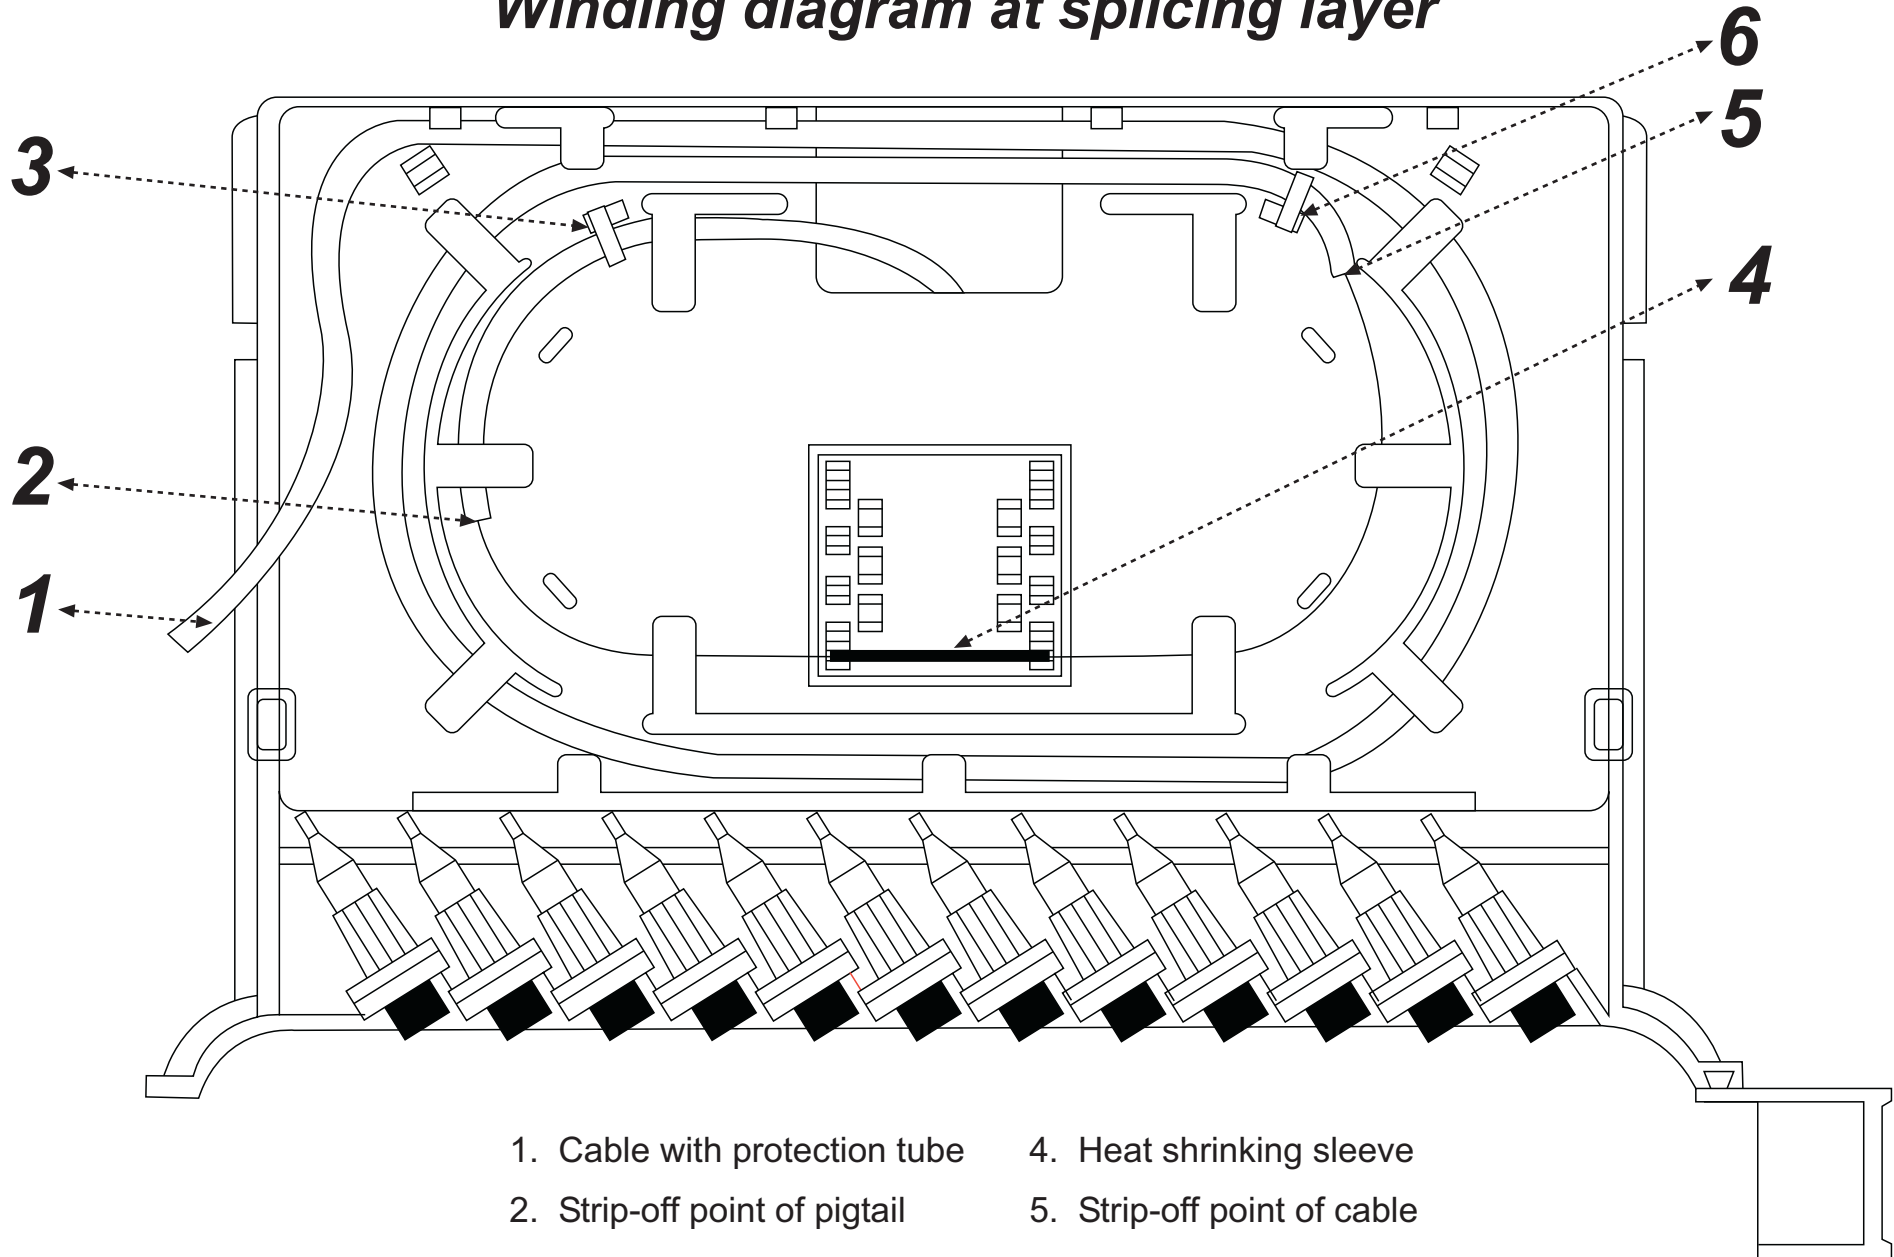

1. Cable with protection tube
2. Strip-off point of pigtail
3. Fixed point of pigtail

4. Heat shrinking sleeve
5. Strip-off point of cable
6. Fixed point of cable