


Simplex indoor cable

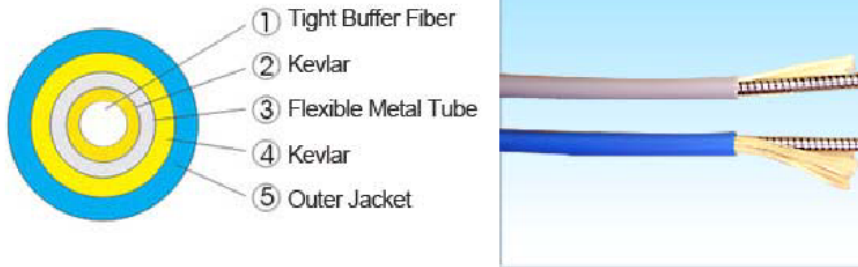

Cable Structure:

0.6mm tight buffer fiber+Kevlar+Flexible metal tube+Kevlar+Outer jacket(PVC)

Features:

Flexible metal tube protect the fiber optic.

1. High compression resistant,high tensile resistant, rat –bite resistant.
2. Bend resistant and optimum flexible.
3. Easy wiring,secured and reliable.

Specification¶meter

Item		Singlemode	
Outer diameter		3mm	
Standard color		Blue	
Cable weight		15kg/km approx.	
Operating temperature		-20℃~+60℃	
Storage temperature		-20℃~+70℃	
Tensile strength	Short term	200N	
	Long term	100N	
Compression resistant strength		≥150KGf/100MM	
General attenuation		1310nm	≤0.36dB/KM
		1550nm	≤0.22dB/KM
Bending radius	Dynamic	50mm	
	Static	30mm	